

SURAT KETERANGAN

Nomor: 2408/UNUSA-LPPM/Adm-I/XI/2022

Lembaga Penelitian dan Pengabdian Kepada Masyarakat (LPPM) Universitas Nahdlatul Ulama Surabaya menerangkan telah selesai melakukan pemeriksaan duplikasi dengan membandingkan artikel-artikel lain menggunakan perangkat lunak **Turnitin** pada tanggal 08 November 2022.

Judul : *Estimation of Closed Hotels and Restaurants in Jakarta as Impact of Corona Virus Disease (Covid-19) Spread Using Backpropagation Neural Network*

Penulis : Fajar Annas Susanto, M. Yusak Ashori, D. Rachmalia, K. Oktafianto, D. Adzkiya, Puspandam Katias, Teguh Herlambang

No. Pemeriksaan : 2022.09.11.1015

Dengan Hasil sebagai Berikut:

Tingkat Kesamaan diseluruh artikel (*Similarity Index*) yaitu 19%

Demikian surat keterangan ini dibuat untuk digunakan sebagaimana mestinya

Surabaya, 09 November 2022

Ketua LPPM,



UNUSA
LPPM

Achmad Syafiuddin, Ph.D.

NPP. 20071300

LPPM Universitas Nahdlatul Ulama Surabaya

Website : lppm.unusa.ac.id

Email : lppm@unusa.ac.id

Hotline : 0838.5706.3867

Estimation of Closed Hotels and Restaurants in Jakarta as Impact of Corona Virus Disease (Covid-19) Spread Using Backpropagation Neural Network

by Fajar Annas Susanto

Submission date: 08-Nov-2022 01:57PM (UTC+0700)

Submission ID: 1948023357

File name: PAPER_HOTEL_NDST_V_22_N4_SEPT_2022.pdf (8.9M)

Word count: 3456

Character count: 18166



1 Estimation of Closed Hotels and Restaurants in Jakarta as Impact of Corona Virus Disease (Covid-19) Spread Using Backpropagation Neural Network

F. A. Susanto¹, M. Y. Anshori², D. Rahmalia³, K. Oktafianto⁴,
D. Adzkiya⁵, P. Katias² and T. Herlambang^{1*}

¹ Department of Information Systems, University of Nahdlatul Ulama Surabaya, Indonesia.

² Department of Management, University of Nahdlatul Ulama Surabaya, Indonesia.

³ Department of Mathematics, University of Islam Darul Ulum Lamongan, Indonesia.

⁴ Department of Mathematics, University of PGRI Ronggolawe, Tuban, Indonesia.

⁵ Department of Mathematics, Sepuluh Nopember Institute of Technology, Surabaya, Indonesia.

□

5

Received: October 11, 2021; Revised: September 10, 2022

Abstract: Corona Virus Disease (Covid-19) has become the focus of world attention because it attacked many people in the world and many people died. The effect of Covid-19 is not only on the health of people, it is negatively affecting all aspects of life including the social area, economy, sport, and tourism. Hotels and restaurants that are an important part of the tourism industry have got a big negative impact from Covid-19. Since this disease has spreaded in many countries including Indonesia, the Indonesian government adopted regulations to close the hotels and restaurants to prevent the spread of Covid-19. This research comes from the need to find out the estimated number of hotels and restaurants to be closed due to Covid-19. The estimation method will involve the Backpropagation Neural Network. The backpropagation Neural Network can make estimation of the number of closed hotels and restaurants approaching the target. Simulations are applied by splitting the dataset into training data (80%) and testing data (20%). From Backpropagation Neural Network simulations, the Backpropagation Neural Network can make estimation of the number of closed hotels and restaurants in training data with optimal RMSE being 9.2422 and testing data with optimal RMSE being 8.9419.

Keywords: backpropagation; neural network; estimation; Covid-19.

Mathematics Subject Classification (2010): 68T07, 92B20.

* Corresponding author: <mailto:teguh@unusa.ac.id>

1 Introduction

In early 2020, Corona Virus Disease (Covid-19) has become the focus of world attention because it attacked many people in the world and many people died. This disease was firstly found in China and then it spreaded worldwide, including Indonesia. Covid-19 is the disease caused by the Corona virus resembling SARS, so that it is named SARS-CoV2. The symptoms of this disease are fever, tiredness, dry cough, sore throat, difficulty in breathing or shortness of breath.

Because this disease has spreaded in many countries including Indonesia, the Indonesia governments adopted regulations to close the hotels and restaurants to prevent the spread of Covid-19. The tourism industry is the industry that has multiplier effect in a country or region. This industry is strongly affected by Covid-19 and it will need long time to recover. Hotels are one of the biggest players in the tourism industry. Many new hotels are built in tourism cities and metropolitan cities such as Jakarta and Surabaya [1,2]. Jakarta is the city in Indonesia where the first victim came and the city with the most Covid-19 positive victims. Because of that, the estimation of the number of closed hotels and restaurants in Jakarta is important to be done. In this research, the estimation method will involve the Backpropagation Neural Network [3].

A neural network (NN) was introduced by McCulloch and Pitts in 1943. The NN work resembles that of the human neuron system. The type of a Neural network used in the estimation process is Backpropagation. Backpropagation consists of forward propagation, backward propagation, and updating weight matrices. In forward propagation, some computations using an activation function start from the input, hidden layer, and output, respectively. In backward propagation, error factor computations are applied from the output, hidden layer, and input, respectively. After that, we update weight matrices [4,5].

In the previous research, forecasting methods for estimation have been applied by exponential smooting [1], Kalman Filter on mobile robot trajectory [6], Kalman Filter Estimation [7], Autonomous Underwater Vehicle Optimization [8,10] steam temperature and water level estimation [11], stock price estimation [12,13], crude oil and profitability estimation [14-16], Blood Stock Estimation [17,18], arm robot motion estimation [19], and fuzzy logic by Adaptive Neuro Fuzzy Inference System [20]. Backpropagation has been applied in weather prediction [2,21] with various types of data [22]. This algorithm is applied in training data and testing data in a certain proportion. In this research, the Backpropagation Neural Network will be used for estimating the number of closed hotels and restaurants in Jakarta. In making estimation of the number of closed hotels and restaurants using the Backpropagation Neural Network, some inputs are required such as the number of positive victims in Jakarta, the number of recovered victims in Jakarta, the number of dead victims in Jakarta, the number of positive victims in Indonesia, the number of recovered victims in Indonesia, the number of dead victims in Indonesia, the number of positive victims in the world, the number of recovered victims in the world, and the number of dead victims in the world.

From Backpropagation Neural Network simulations, the Backpropagation Neural Network can make estimation of the number of closed hotels and restaurants in training data with optimal RMSE being 9.2422 and testing data with optimal RMSE being 8.9419. We also repeat these simulations five times.

2 Literature Review

A Neural Network was introduced by Mc Culloch and Pitts in 1943. The behavior of a Neural Network is as follows: (a) the signal is traveling between neurons through a connector; (b) connectors have weight which will either increase or decrease the signal; (c) To determine the output, a neuron uses an activation function applied in the sum of inputs received.

In a Neural Network, an activation function is used for determining the output of a neuron. The argument of an activation function is a linear combination of the input and weight as in equation (1):

$$net = \sum_i x_i w_i, \quad f(net) = f\left(\sum_i x_i w_i\right). \tag{1}$$

The activation function used is continuous, differentiable, and not descending function. In this research, the activation function applied is binary sigmoid with the range (0-1) as in equation (2):

$$f(net) = \frac{1}{1 + e^{-net}},$$

$$f'(net) = f(net)(1 - f(net)). \tag{2}$$

Backpropagation is a type of the Neural Network used in the estimation process. Backpropagation consists of some inputs x_1, x_2, \dots, x_n , some hidden layer z_1, z_2, \dots, z_p , and some output y_1, y_2, \dots, y_m . In the input and hidden layer, there is bias with value 1. Weight v_{ij} connects input x_i to hidden layer z_j . Weight w_{jk} connects hidden layer z_j to output y_k . In Backpropagation, there are three phases of calculation such as forward propagation, backward propagation, and update weight matrices. A backpropagation model can be seen in Figure 1:

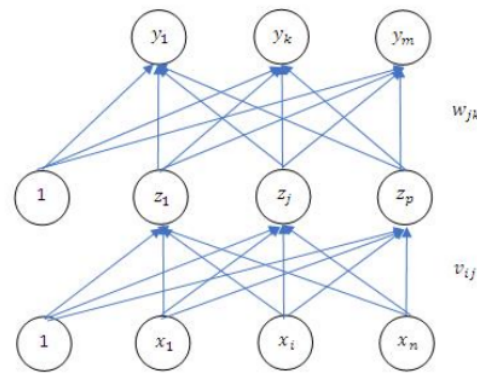


Figure 1: Backpropagation Neural Network Model.

The algorithm of a Backpropagation Neural Network is as follows:

Initialization weight matrices V and W with random number between -0.5 to 0.5 .

$e = 1$

while($e < \text{max_epoch}$ && $MSE > \text{min_MSE}$)

for($d = 1 : \text{data_size}$)

- Each input receives a signal which continues to each hidden layer through forward propagation in equation (3) until equation (6) and backward propagation in equation (7) until equation (11).

Forward Propagation

- All outputs $z_j, j = 1, 2, \dots, p$ are calculated in the hidden layer in equation (4).

$$z_{net_j} = v_{oj} + \sum_{i=1}^n x_i v_{ij}, \quad (3)$$

$$z_j = f(z_{net_j}) = \frac{1}{1 + e^{-z_{net_j}}}. \quad (4)$$

- Calculate all outputs $y_k, k = 1, 2, \dots, m$, in equation (6).

$$y_{net_k} = w_{ok} + \sum_{j=1}^p z_j w_{jk}, \quad (5)$$

$$y_k = f(y_{net_k}) = \frac{1}{1 + e^{-y_{net_k}}}. \quad (6)$$

Backward Propagation

- Calculate the factor δ output based on the error in each output $y_k, k = 1, 2, \dots, m$.

$$\delta_k = (t_k - y_k) f'(y_{net_k}). \quad (7)$$

- Calculate the weight update

$$\Delta w_{jk} = \alpha \delta_k z_j, \quad k = 1, 2, \dots, m, \quad j = 0, 1, 2, \dots, p. \quad (8)$$

- Calculate the factor δ hidden layer in equation (10) based on the error in each hidden layer $z_j, j = 1, 2, \dots, p$,

$$\delta_{net_j} = \sum_{k=1}^m \delta_k w_{jk}, \quad (9)$$

$$\delta_j = \delta_{net_j} f'(z_{net_j}). \quad (10)$$

- Calculate the weight update

$$\Delta v_{ij} = \alpha \delta_j x_i, \quad j = 1, 2, \dots, p, \quad i = 0, 1, 2, \dots, n. \quad (11)$$

Update Weight Matrices

8. Update the new weight matrices

$$w_{jk} = w_{jk} + \Delta w_{jk}, \quad (12)$$

$$v_{ij} = v_{ij} + \Delta v_{ij}. \quad (13)$$

end

Compute the ²⁴ root of mean square error (RMSE)

$$RMSE = \sqrt{\frac{1}{datasize} \sum_{d=1}^{datasize} \frac{1}{m} \sum_{k=1}^m (T_{dk} - Y_{dk})^2}, \quad (14)$$

where ³ T_{dk} is the target value and Y_{dk} is outputs.

$e = e + 1$

end

3 Result and Discussion

Datasets are taken from the report of closed hotels and restaurants from March 1, 2020 until April 30, 2020 (61 days), issued by the Indonesian Hotels and Restaurants Association, with the observed area of Jakarta as the first city where Covid-19 was first discovered. These data will be estimated by the Backpropagation Neural Network.

In addition, there are the data of the number of Covid-19 victims (positive, recovered, dead) in Jakarta from March 1, 2020 until April 30, 2020, obtained from the official Covid-19 Jakarta website, the data of the number of Covid-19 victims (positive, recovered, dead) in Indonesia from March 1, 2020 until April 30, 2020, obtained from the ²² Ministry of Health, Republic of Indonesia, and the data of the number of Covid-19 victims (positive, recovered, dead) in world from March 1, 2020 until April 30, 2020, obtained from the Worldometer website. They will be used as inputs in the Backpropagation Neural Network, where the output is the number of closed hotels and restaurants in Jakarta from March 1, 2020 until April 30, 2020, as estimations.

3.1 Data Used

The graph of the number of closed hotels and restaurant from March 1, 2020 until April 30, 2020, in Jakarta can be seen in Figure ².

For estimating the number of closed hotels and restaurants by the Backpropagation Neural Network, we need some inputs such as the number of positive victims in Jakarta, the number of recovered victims in Jakarta, the number of dead victims in Jakarta, the number of positive victims in Indonesia, the number of recovered victims in Indonesia, the number of dead victims in Indonesia, the number of positive victims in the world, the number of recovered victims in the world, and the number of dead victims in the world.

The graph of the number of Covid-19 victims in Jakarta from March 1, 2020 until April 30, 2020, ⁶ can be seen in Figure ³. There are three parts of the graph with different colors that are the number of positive victims, the number of recovered victims, and the number of dead victims.

The graph of the number of Covid-19 victims in Indonesia from March 1, 2020 until April 30, 2020, can be seen in Figure ⁴. There are three parts of the graph with different

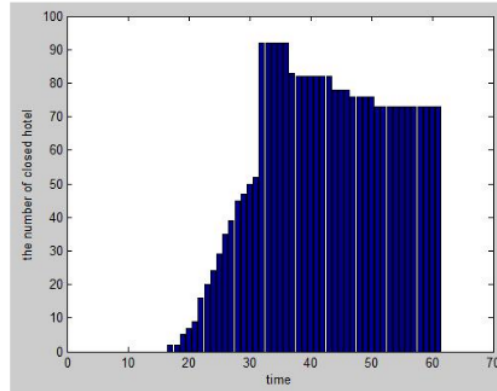


Figure 2: The number of closed hotels and restaurants.


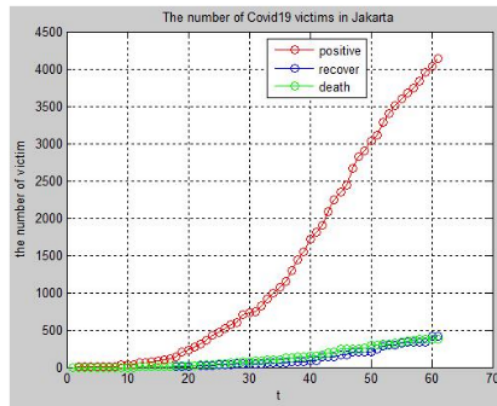


Figure 3: The number of Covid-19 victims in Jakarta.

6 colors that are the number of positive victims, the number of recovered victims, and the number of dead victims.

The graph of the number of Covid-19 victims in the world from March 1, 2020 until April 30, 2020, **6** can be seen in Figure **5**. There are three parts of the graph with different colors that are the number of positive victims, the number of recovered victims, and the number of dead victims.

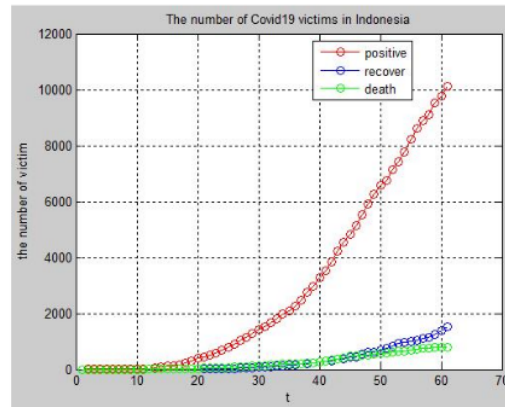

9 **Figure 4:** The number of Covid-19 victims in Indonesia.

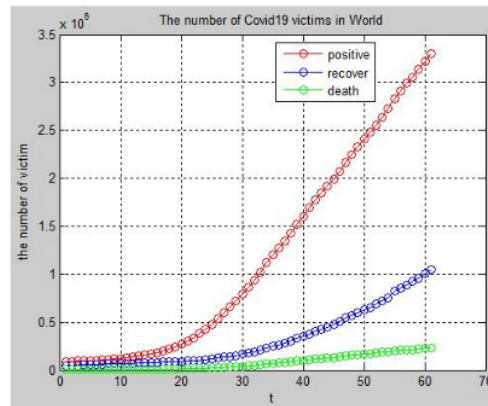


Figure 5: The number of Covid-19 victims in the world.

3.2 Estimation Results

21 Before applying the estimation process, we need to split the data into training data and testing data. The data partition used is as follows: for training data, the data used have the proportion of 80% of all data, while for testing data, the data used have the remaining proportion (20% of all data). Figure 6 shows the data partition, where the red plus marks represent the distribution of testing data, and the blue ones represent training data.

The parameters used in the Backpropagation Neural Network simulation are:

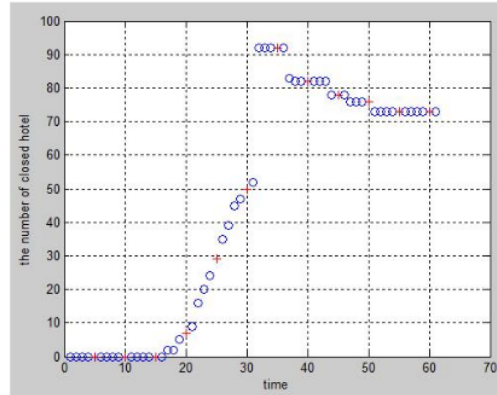


Figure 6: Data partition into training data (blue) and testing data (red).

20

Learning rate : 0.2.

The number of hidden layer : 2.

Maximum epoch : 1000.

The model of backpropagation : 9 (input) – 10 (hidden layer 1) – 10 (hidden layer 2) – 1 (output).

19

The simulation of the Backpropagation Neural Network can be seen in Figures 7, 8 and 9 below. First, initialize the weight matrices and apply to training data using the Backpropagation Neural Network until the maximum epoch, the convergence process can be seen in Figure 7. It can be seen in the early epoch, the RMSE resulted is quite large. In the optimization, the RMSE is decreased and converged. Figure 8 shows the comparison and error between the target and output. From the training process until 1000 epochs, optimal weight matrices are obtained. Then, the optimal weight matrices are applied to testing data. Figure 9 shows simulation for testing data.

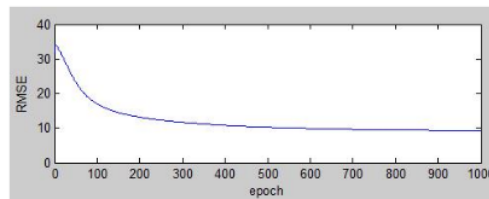



Figure 7: Convergence Process of the Backpropagation Neural Network.

2

From the simulation, we obtain the estimation with the root of mean square error (RMSE) in equation (14) as follows:

Training data : 9.2422.

Testing data : 8.9419.

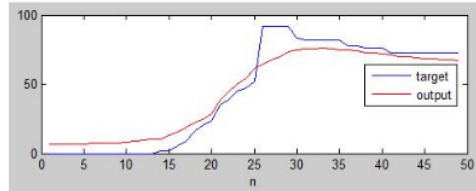

18
Figure 8: Estimation result for training data.

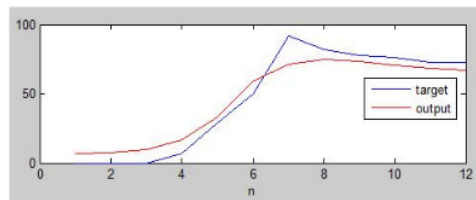


Figure 9: Estimation result for testing data.

We repeat the simulations five times using different initial weights and the results are given in Table 1.

Number	Max epoch	RMSE for training data	RMSE for testing data
1	1000	9.5604	9.3628
2	1000	9.0513	8.7649
3	1000	9.0156	8.8002
4	1000	9.1428	8.9463
5	1000	8.9626	8.6265

2
Table 1: The root of mean square error (RMSE) in the Backpropagation Neural Network with five times trials.

4 Conclusion

The corona Virus (Covid-19) has been negatively affecting the hotels and restaurants businesses. Hotels and restaurants have become a primary need of the business people, especially in a big city like Jakarta. The closed hotels and restaurants due to Covid-19 are also affecting the tax income of the government as well as the income of the suppliers. In making estimation of the number of closed hotels and restaurants using the Backpropagation Neural Network, some inputs are required, such as the number of positive victims in Jakarta, the number of recovered victims in Jakarta, the number of dead victims in Jakarta, the number of positive victims in Indonesia, the number of recovered victims in Indonesia, the number of dead victims in Indonesia, the number

of positive victims in the world, the number of recovered victims in the world, and the number of dead victims in the world.

The Backpropagation Neural Network can make estimation of the number of closed hotels and restaurants approaching the target. Simulations are applied by splitting the dataset into training data (80%) and testing data (20%). From Backpropagation Neural Network simulations, the Backpropagation Neural Network can make estimation of the number of closed hotels and restaurants in training data with optimal RMSE being 9.2422 and testing data with optimal RMSE being 8.9419.

The developments of this research are making estimation and classification of the results by data mining and machine learning techniques.

Acknowledgment

This research was supported by LPPM – Nahdlatul Ulama Surabaya of University (UNUSA).

References

- [1] D. Rahmalia. Estimation of Exponential Smoothing Parameter on Pesticide Characteristic Forecast using Ant Colony Optimization (ACO). *Eksakta: Jurnal Ilmu-ilmu MIPA* **18** (1) (2018) 56–63.
- [2] D. Rahmalia and N. Aini. Pengaruh Korelasi Data pada Peramalan Suhu Udara Menggunakan Backpropagation Neural Network. *Zeta-Math. Journal* **4** (1) (2018) 1–6.
- [3] H. A. Abbas, A. Seghior, M. Belkheiri and M. Rahmani. Robust Output Feedback Stabilization and Boundedness of Highly Nonlinear Induction Motors Systems Using Single-Hidden-Layer Neural-Networks. *Nonlinear Dynamics and Systems Theory* **19** (3) (2019) 331–347.
- [4] L. Fausett. *Fundamental of Neural Networks*. Prentice Hall, USA, 1994.
- [5] B. Benaid, H. Bouzahir, C. Imzegouan and F. E. Guezar. Stability Analysis for Stochastic Neural Networks with Markovian Switching and Infinite Delay in a Phase Space. *Nonlinear Dynamics and Systems Theory* **19** (3) (2019) 372–385.
- [6] T. Herlambang, R. A. Rasyid, S. Hartatik and D. Rahmalia. Estimasi Posisi Mobile Robot Menggunakan Akar Kuadrat Unscented Kalman Filter (AK-UKF). *Technology Science and Engineering Journal* **1** (2) (2017).
- [7] D. K. Arif, D. Adzkiya and H. N. Fadhilah. Kalman Filter Estimation of Identified Reduced Model Using Balanced Truncation: a Case Study of the Bengawan Solo River. *Nonlinear Dynamics and Systems Theory* **19** (4) (2019) 455–463.
- [8] T. Herlambang, D. Rahmalia, and T. Yulianto. Particle Swarm Optimization (PSO) and Ant Colony Optimization (ACO) for Optimizing PID Parameters on Autonomous Underwater Vehicle (AUV) Control System. In: *The Second International Conference on Combinatorics, Graph Theory and Network Topology, University of Jember-Indonesia, 24-25 Nov 2018. Journal of Physics: Conference Series* **1211** (2019), 012039.
- [9] T. Herlambang, S. Subchan, H. Nurhadi and D. Adzkiya. Motion Control Design of UNUSAITS AUV Using Sliding PID. *Nonlinear Dynamics and Systems Theory* **20** (1) (2020) 51–60.
- [10] T. Herlambang, D. Rahmalia, H. Nurhadi, D. Adzkiya and S. Subchan. Optimization of Linear Quadratic Regulator with Tracking Applied to Autonomous Underwater Vehicle (AUV) Using Cuckoo Search. *Nonlinear Dynamics and Systems Theory* **20** (3) (2021) 282–298.

- [11] T. Herlambang, Z. Mufarrikoh, D. F. Karya, and D. Rahmalia. Estimation of Water Level and Stem Temperature Using Ensemble Kalman Filter Square Root (EnKF-SR). *Journal of Physics: Conference Series*. Jember, Indonesia, 2018.
- [12] D. F. Karya, K. Puspandam, and T. Herlambang. Stock Price Estimation Using Ensemble Kalman Filter Square Root Methods. *The First International Conference on Combinatorics, Graph Theory and Network Topology, University of Jember-Indonesia*, 25-26 Nov 2017. *Journal of Physics: Conference Series* 1008 (2018), 012026.
- [13] D. F. Karya, P. Katias, T. Herlambang, and D. Rahmalia. Development of Unscented Kalman Filter Algorithm for Stock Price Estimation. *Journal of Physics: Conference Series*. Jember, Indonesia, 2019.
- [14] D. F. Karya, M. Y. Anshori, R. R. Mardhotillah, K. Puspandam, A. Muhith and T. Herlambang. Estimation of Crude Oil Price Using Unscented Kalman Filter. In: *The Third International Conference on Combinatorics, Graph Theory and Network Topology, University of Jember-Indonesia, 26-27 Oct 2019. Journal of Physics: Conference Series* 1538 (2020), 012035.
- [15] M. Y. Anshori, T. Herlambang, D. F. Karya, A. Muhith, and R. A. Rasyid. Profitability Estimation of A Company In PT.ABCD Using Extended Kalman Filter. In: *The Third International Conference on Combinatorics, Graph Theory and Network Topology, University of Jember-Indonesia, 26-27 Oct 2019. Journal of Physics: Conference Series* 1538 (2020), 012035.
- [16] M. Y. Anshori, D. F. Karya, N. Muslinah, and T. Herlambang. Analysis of Transformational Leadership Style for Employee Performance with Job Satisfaction as Intervening Variable. *International Journal of Advanced Science and Technology*. **29** (9s) (2020) 3967–3973.
- [17] A. Muhith, T. Herlambang, Irhamah and D. Rahmalia. Estimation of Thrombocyte Concentrate (TC) and Whole Blood (WB) using Unscented Kalman Filter. *International Journal of Advanced Science and Technology* **29** (8s) (2020) 25–32.
- [18] A. Muhith, T. Herlambang, M. Y. Anshori, R. R. Mardhotillah and D. Rahmalia. Estimation of Whole Blood (WB) and Anti-Hemophilic Factor using Extended Kalman Filter in PMI Surabaya. In: *The Third International Conference on Combinatorics, Graph Theory and Network Topology, University of Jember-Indonesia, 26-27 Oct 2019. Journal of Physics: Conference Series* 1538 (2020), 012035.
- [19] T. Herlambang, A. Muhith, D. Rahmalia, and H. Nurhadi. Motion Optimization using Modified Kalman Filter for Invers-Kinematics based Multi DOF Arm Robot. *International Journal of Control and Automation* **13** (2s) (2020) 6–71.
- [20] D. Rahmalia and A. Rohmatullah. Pengaruh Korelasi Data pada Peramalan Kelembaban Udara Menggunakan Adaptive Neuro Fuzzy Inference System (ANFIS). *Applied Technology and Computing Science* **2** (1) (2019) 10–24.
- [21] D. Rahmalia and T. Herlambang. Prediksi Cuaca Menggunakan Algoritma Particle Swarm Optimization-Neural Network (PSO-NN). *Prosiding Seminar Nasional Matematika dan Aplikasinya*. Surabaya, Indonesia, (2017).
- [22] D. Rahmalia and M. S. Pradana. Backpropagation Neural Network pada Data yang tak Stasioner (Studi Kasus: Jumlah Penderita Penyakit Ebola). *Jurnal Riset dan Aplikasi Matematika (JRAM)* **3** (1) (2019) 32–42.
- [23] J. Han, M. Kamber and J. Pei. *Data Mining Concepts and Techniques*. Elsevier, USA, 2012.

Estimation of Closed Hotels and Restaurants in Jakarta as Impact of Corona Virus Disease (Covid-19) Spread Using Backpropagation Neural Network

ORIGINALITY REPORT

19%

SIMILARITY INDEX

11%

INTERNET SOURCES

11%

PUBLICATIONS

8%

STUDENT PAPERS

PRIMARY SOURCES

1	www.e-ndst.kiev.ua Internet Source	3%
2	T Herlambang, D Rahmalia, H Nurhadi, A Suryowinoto, D F Karya. "Estimation of shoulder and elbow joint angle from linear quadratic tracking based on six muscle force vectors", Journal of Physics: Conference Series, 2022 Publication	2%
3	Submitted to UIN Sunan Ampel Surabaya Student Paper	2%
4	Submitted to Universitas Nahdlatul Ulama Surabaya Student Paper	1%
5	repository.unusa.ac.id Internet Source	1%
6	www.science.gov Internet Source	1%

7	repository.upiyptk.ac.id Internet Source	1 %
8	jurnalsaintek.uinsby.ac.id Internet Source	1 %
9	Submitted to Queen's University of Belfast Student Paper	1 %
10	id.scribd.com Internet Source	1 %
11	M Ahsan, W Setiyaningsih, B Rinanto, M Susilowati, I Sulistiyowati. "Weather prediction system and recommendation of plant varieties as an effort to minimize harvest failure with android-based Backpropagation Artificial Neural Networks", IOP Conference Series: Materials Science and Engineering, 2021 Publication	<1 %
12	Teguh Herlambang, Dinita Rahmalia, Denis Fidita Karya, Fajar Annas Susanto, Firman Yudianto, Okol Sri Suharyo. "Optimal Control Model of Two Dimensional Missile Using Forward Backward Sweep Method (FBSM)", 2021 International Conference on Computer Science, Information Technology, and Electrical Engineering (ICOMITEE), 2021 Publication	<1 %

13

Submitted to Study Group Australia

Student Paper

<1 %

14

Zhibin Yin, Yan Zhen, Chao Huo, Jing Chen. "Deep learning based transformer fault diagnosis method", 2021 IEEE 2nd International Conference on Big Data, Artificial Intelligence and Internet of Things Engineering (ICBAIE), 2021

Publication

<1 %

15

jurnal.ubd.ac.id

Internet Source

<1 %

16

Dinita Rahmalia, Nur Aini. "Pengaruh Korelasi Data pada Peramalan Suhu Udara Menggunakan Backpropagation Neural Network", Zeta - Math Journal, 2018

Publication

<1 %

17

www.xiahepublishing.com

Internet Source

<1 %

18

M Y Anshori, D Rahmalia, T Herlambang, D F Karya. "Optimizing Adaptive Neuro Fuzzy Inference System (ANFIS) parameters using Cuckoo Search (Case study of world crude oil price estimation)", Journal of Physics: Conference Series, 2021

Publication

<1 %

19

R. Spina, S. Upadhyaya. "Linear circuit fault diagnosis using neuromorphic analyzers",

<1 %

IEEE Transactions on Circuits and Systems II: Analog and Digital Signal Processing, 1997

Publication

20

journal.unesa.ac.id

Internet Source

<1 %

21

Deny Haryadi, Dewi Marini Umi Atmaja, Arif Rahman Hakim, Wina Witanti. "Classification of Drug Effectiveness Based on Patient's Condition Using Text Mining With K-Nearest Neighbor", 2022 International Conference on ICT for Smart Society (ICISS), 2022

Publication

<1 %

22

Gilang Nugraha, Nur Masruroh, Diyan Wahyu Kurniasari. "Comparative Test of Ret-He Examination in Diagnosis of Iron Deficiency in Pregnant Women", Medical Laboratory Technology Journal, 2020

Publication

<1 %

23

Lecture Notes in Computer Science, 2007.

Publication

<1 %

24

journal2.unusa.ac.id

Internet Source

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On